

7 U H Q F K 0 2 6 % D U U L H U 6 F K R W W N \ 5 H

Features

- ‡ \$ G Y D Q W U H G Q F K W H F K Q R O R U \
- ‡ / R Z R U Z D Y R G W D J H G U R S
- ‡ / R Z R Z I O R V V H V
- ‡ + L J H I L F L H Q F \ R S H U D W L R Q
- ‡ / H D G H H L Q L V K & R P 6 O L D Q W

Applications

- ‡ ' & ' & & R Q Y H U W H U V
- ‡ \$ & ' & \$ G D S W R U V
- ‡ 6 Z L W F X R Z H X S S O L H V
- ‡) U H H Z K H H L Q G Q J V

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

| 3 D U D P H W H U | 6 \ P E R O | / L P L W | 8 Q L W |
|--|----------------------|-----------|---------|
| 0 D [L P X P H S H V S H M U N Y Y H Y U R Q W D J H | 9 5 5 0 | | 9 |
| 0 D [L P X P Y H U D R J U Z D U G U F X E W H I Q W G | ,) \$ 9 | | \$ |
| 3 H D N I R U Z D U F S U U H Q W V L Q D O H Q Z D Y H V X S H U L P S Q M H V G R S E G L R G H | ,) 6 0 | 2 | \$ |
| 2 S H U D M X Q E D Q L Q W R U D J H W H P S H U D W X O H 0 6 7 C J H 5 W R | | | |
| 7 \ S L F W D C H U P D O U S H V U L V O H D Q F H ' 2 \$ ' | 5 \$ - & f & \$ a | 2 | f & : |

,pQ ccS" ,1 &RtRqG ccS" ,1 &Rp•Á1 ccS" ,7 2H' c 6

U É (Ü Ø Ä J F i æ , @ v W R G p P h 2 € € € P 7 5'

7- f &

X \$

1 R W H V



3 X O V H W H V V S X O V H Z L G W K G X W \ F \ F O H

3 X O V H W H V W 3 X O P V H Z L G W K 0


RATINGS AND CHARACTERISTICS CURVES

7\$

f & X Q O H V Q R W K B U Z L V H

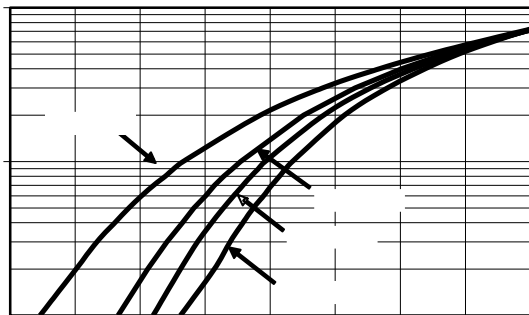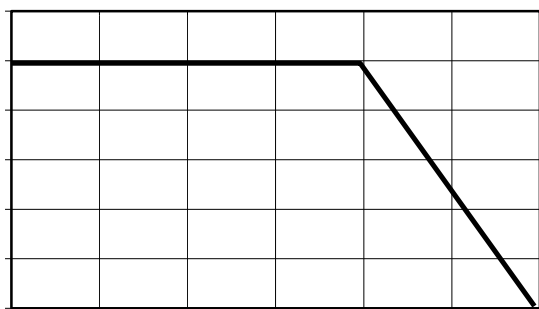


PACKAGE OUTLINE DIMENSIONS

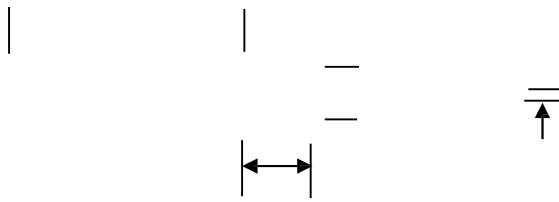


0DUNLQJ ,QIRUPDWLRQ

&DWKRGH



73URGXFW PRGHO 76\$ /

83' & LQIRUPDWLRQ

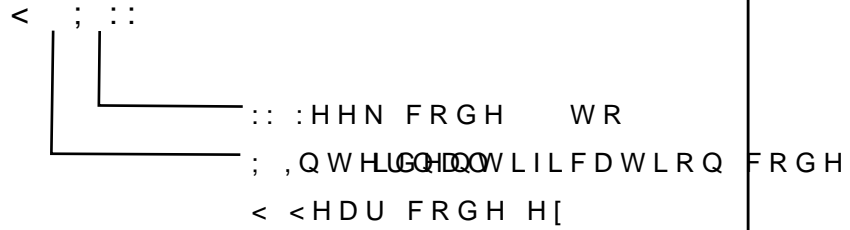


\$QRGH

3DFNDJLQJ ,QIRUPDWLRQ

,QVLGH %R[

2XWVLGH %R[

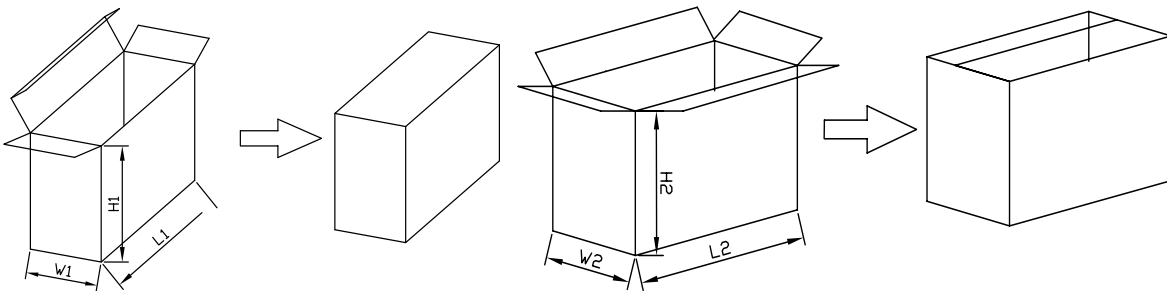

3DFNDJLQJ ,QIRUPDWLRQ

| 12 | 81,7 | ,QVLGH %R[| | | 2XWVLGH %R[| | |
|------|----------------|----------------------|---|---|--------------------|---|---|
| 6L]H | PP | / | : | + | / | : | + |
| | 3&6 | 6PDOSDFWDJH3&6FDUWRQ | | | 3&6 FDUVERQHLWRWDO | | |
| 1RW | 7ROHUDQF#P" PP | PP" PP | | | PP" PP | | |