

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD

TSA /



Cathode  Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURGRVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ ' & ' & RQYHUWHUV
- ‡ \$ & ' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡)UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPHSHVSHUNYHYURQWDJH		9550		9
0D[LPHYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUHQW VLQDQHQZDYH VXSHULPSQNDVGRSGLRGH		,) 60		\$
2SHUDMXQEDVLRQWRUDJH WHPSHUDW		XUH 0DZJH	WR	f &
7\SLFVCHUPDO USHVUVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRUJZDUG SHGLRGH	,) \$	7- f &	7 < 3	9
	,) \$	7- f &	0\$;	
	,) \$	7- f &	5	
	,) \$	7- f &		
,QVWDQWDQHRXUUSHOMRQWH UDWHYHYURQWDJH	7- f &	,5		X\$
	7- f &			P\$

1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH


3XOVH WHVW 3XOPH ZLGWK 0

, I\$YHUDJH)RUZDUG &XUJHQQ




, I, QVWDQW)RQWZRUJH UH\$QW

, U 5HYHUVHX\$XUJHQQ

RATINGS AND CHARACTERISTICS CURVES 7\$ f & XQOHVQRWKBUZLVH

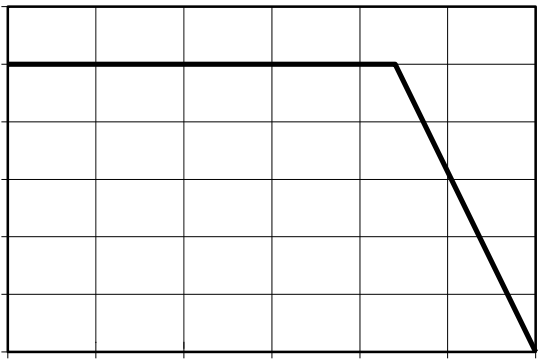


7F & DVH 7&HPS

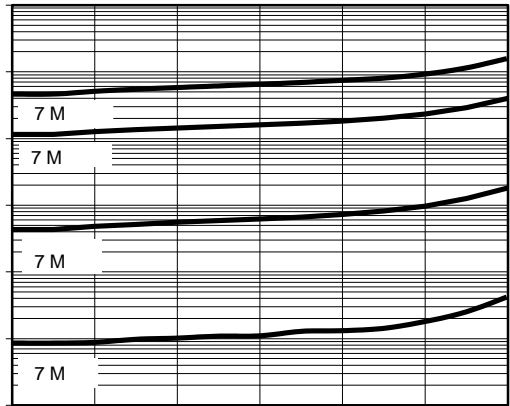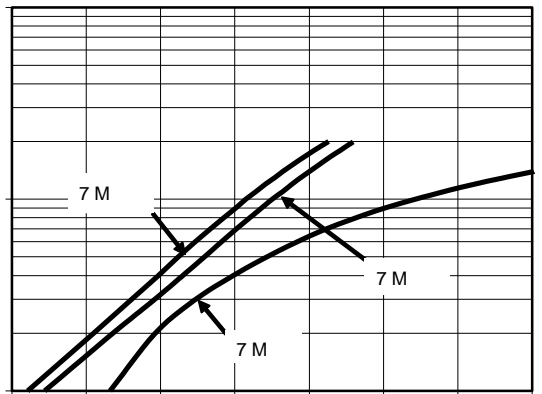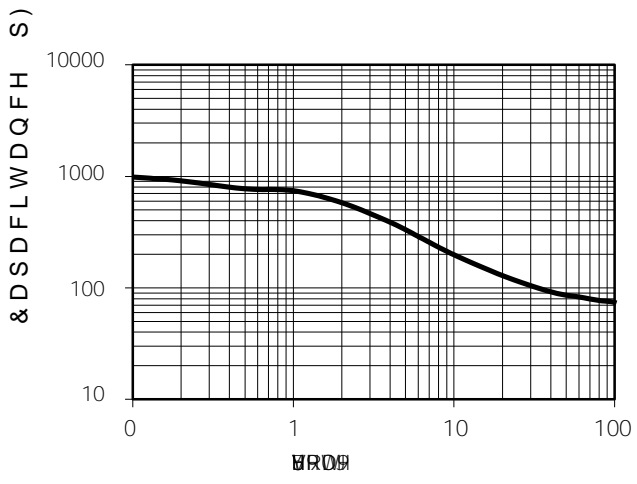

9I ,QVWDQWDQHRXV)RUZDUG 9ROWDJH P95 5HYHUVH 9ROWDJH 9ROWV

PACKAGE OUTLINE DIMENSIONS

DO-201AD

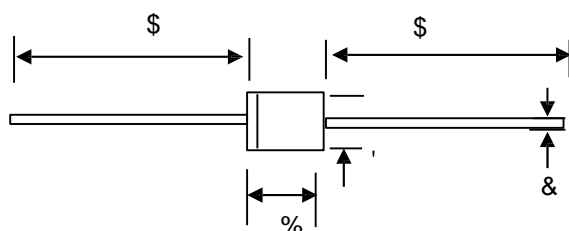

'2 \$' PHFKD QLFWD

81,7		\$	%		'
PP	PD[□ 4	
	PLQ			□ 1	
PLO	PD[□ □	
	PLQ				

0DUNLQJ ,QIRUPDWLRQ

C a t h o d e



A n o d e

73URGXFW P@GHO

83' & LQIRUPDWLRQ

M' L' KK

KK. KY_ ' V&XYfI\$% hc')' Ł

L. =bhYfbU] XYbh] Z] W]h] V&XY

MMUF' V&XYfMl . \$1&\$&\$Ł