

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD
TSA /



Cathode  Anode 

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ '&' &RQYHUWHUV
- ‡ \$&'&GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡)UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXSHVSHUNYHYURQWDJH		9550		9
0D[LXPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUUHQW VLQDQHQZDYH VXSHULPSQNDVGRSGLRGH		,) 60	15	\$
2SHUDMXQEDVLRQWRUDJH WHPSHUDW		XUH 007CJH	5 WR	f &
7\SLFVCHUPDO USHVULVQHDQFH		'2 \$'	2	f & :
,QVWDQWDQHRROWRDUG SHGLRGH	,) \$	7- f &	7 < 3	0\$;
	,) \$	7- f &		
	,) \$	7- f &		
	,) \$	7- f &		
,QVWDQWDQHRXUUSHOMRQW UDWHYHYURQWDJH	7- f &	,5		P\$
	7- f &			P\$

1RWHV


3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0





RATINGS AND CHARACTERISTICS CURVES

7\$

f & X Q O H V Q R W K B U Z L V H

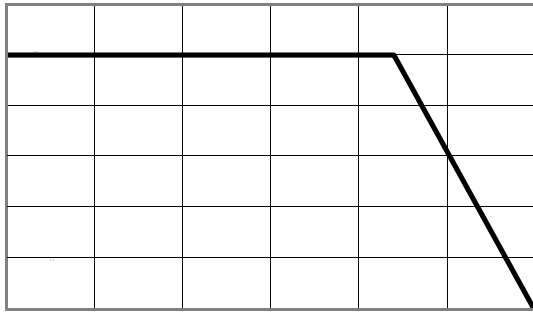


3 HD NR U Z D S X G J & X U U \$ Q W

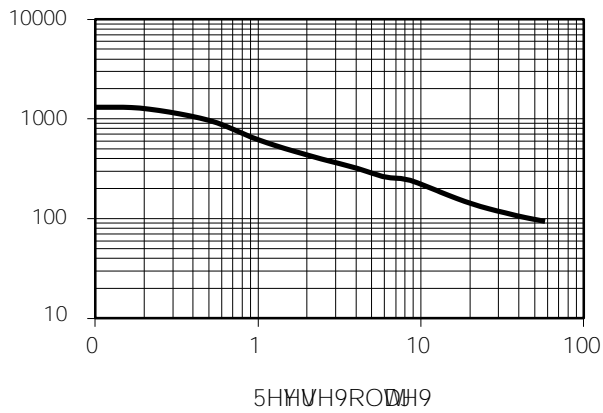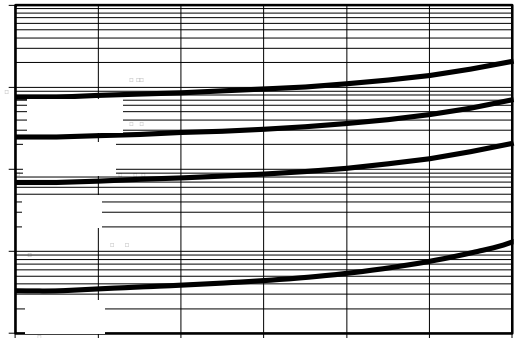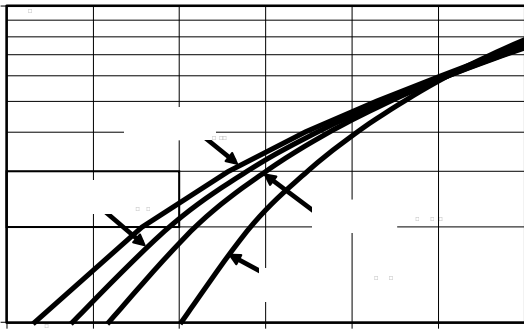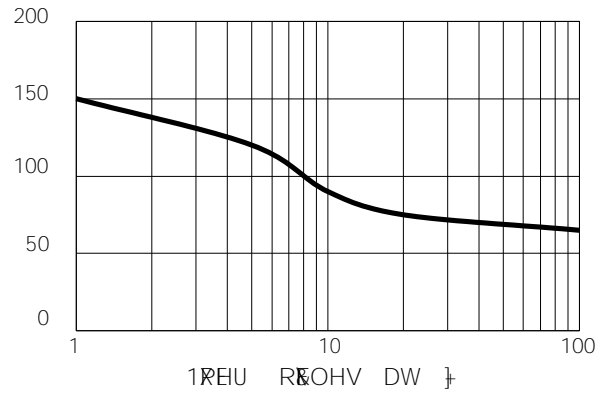

5HYVH9R0DH9


PACKAGE OUTLINE DIMENSIONS

DO-201AD

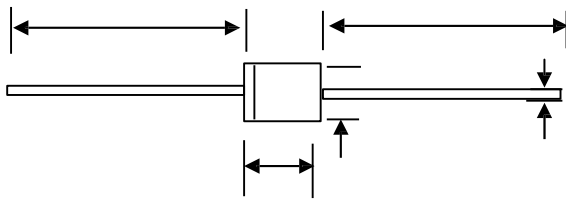


				C	
				1.4	
				1.1	
				5.1	

Marking Information

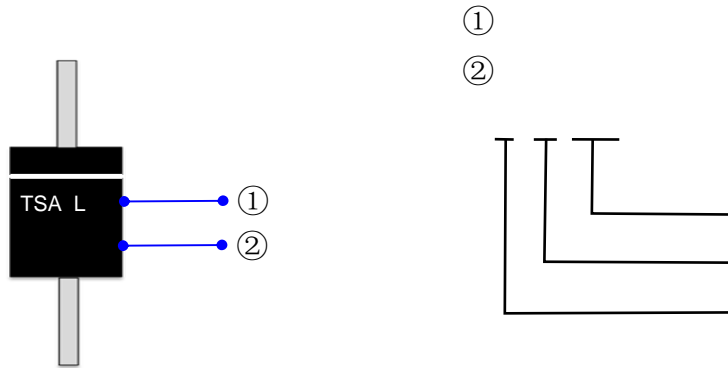

Packaging Information

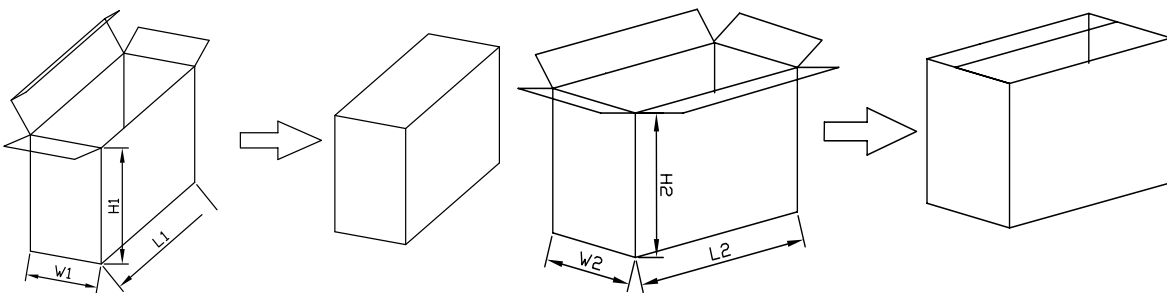

Packaging Information

				4	4		