


## Trench MOS Barrier Schottky Rectifier

**TO-220AB**  
TSR10...0 & 7...



**ITO-220AB**  
TSR10...0 & 7...

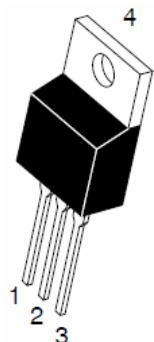

### Features

- Advanced trench technology
- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead Free Finish, RoHS Compliant

### Applications

- DC/DC Converters
- AC/DC Adaptors
- Switching Power Supplies
- Freewheeling Diodes

### Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)

Parameter	Symbol	Limit		Unit
Maximum repetitive peak reverse voltage	VRRM	100		V
Maximum average forward rectified current per device	IF(AV)	10		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load per diode	IFSM	1 0		A
Operating junction and storage temperature range	TJ, TSTG	-55 to +150		
Typical thermal resistance per leg	TO-220AB	R <sub>θJC</sub>	2	
	ITO-220AB		4	
Instantaneous forward voltage per diode		VF(1)	TYP.	MAX.
	IF=3A TJ=25°C		0.45	
	IF=3A TJ=125°C		0.39	
	IF=10A TJ=25°C			
	IF=10A TJ=125°C		0.55	
Instantaneous reverse current per diode at rated reverse voltage	TJ=25°C	IR(2)		uA
	TJ=125°C		5	- mA




Notes:

(1) Pulse test: 300 µs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≤ 40 ms


---

**RATINGS AND CHARACTERISTICS CURVES** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

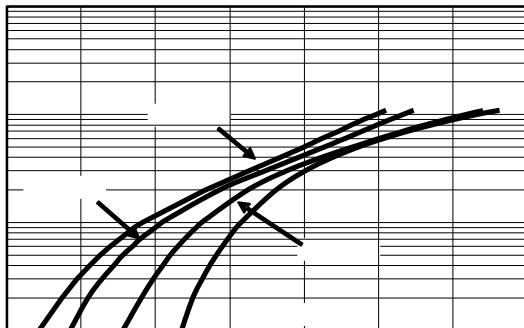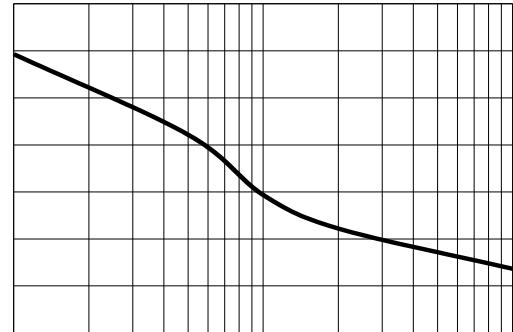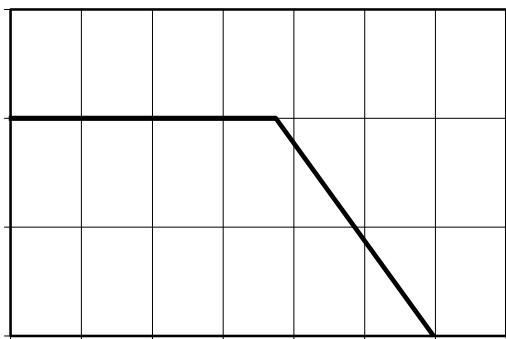


---


## PACKAGE OUTLINE DIMENSIONS

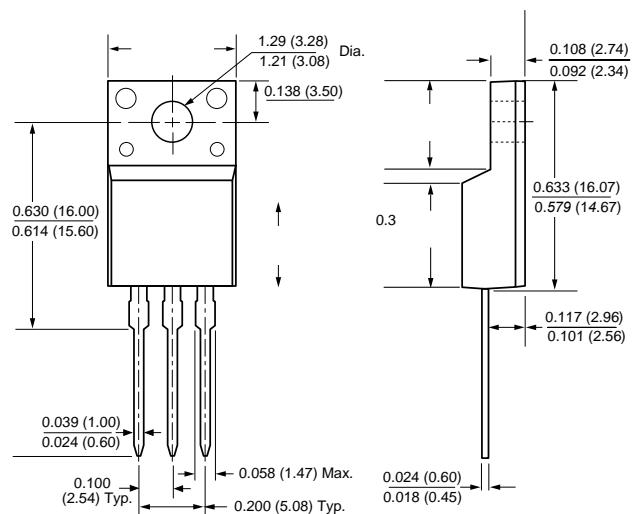

## Marking Information

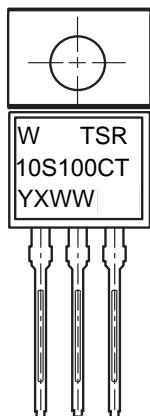


- ① W : Company's trademark
- ② Product model : TSR10S100CT or TSR10S100CTF
- ③ PDC information

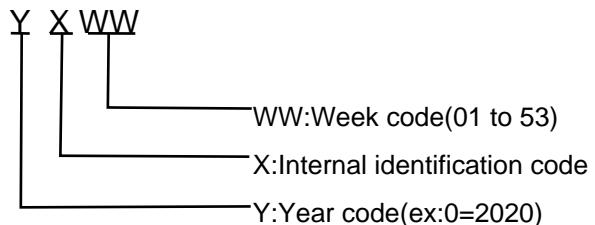


## Packaging Information

### 1.Tube Dimensions

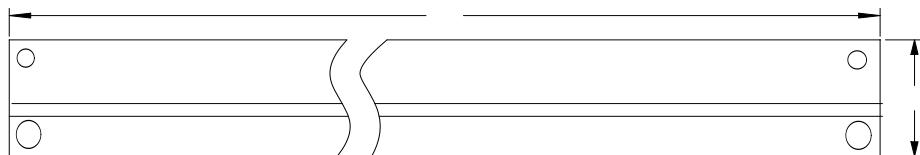

2.Inside Box

3.Outside Box



## Packaging Information

NO	UNIT	Tube Dimensions			Inside Box			Outside Box		
		A	B	C	L1	W1	H1	L2	W2	H2
Size	mm	530	7	33	570	46	150	590	260	180
		50PCS/Tube			Smallest package,1000PCS, 20 tube in total			5,000PCS/carton,5 boxes in total		
Note	Tolerance 20mm,±3mm; 21-100mm,±5mm;			101-500mm,±10mm						