

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD

TSA 9



Cathode Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHS SOLHV
- ‡ )UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPHSHVSHUNYHYURQWDJH		9550		9
0D[LPHYHURJHZDUG UFXJWHIQWG		,) \$9		\$
3HDN IRVZDUEBUHQW VLQDQHQZDYH VXSHULPSQNDVGRSGLRGH		,) 60		\$
2SHUDMXQEDVLRQWRUDJH WHPSHUDW		X0H767°C	JH WR	f &
7\SLFVCHUPDO USHVULVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRJZDUG SHGLRGH	,) \$	7- f&	7 < 3	9
	,) \$	7- f&	0\$;	
	,) \$	7- f&		
	,) \$	7- f&		
,QVWDQWDQHRXUUSHVULVQHW UDWHYHYURQWDJH	7- f&	,5		X\$
	7- f&			P\$

1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH


3XOVH WHVW 3XOPH ZLGWK 0

RATING



129

76\$ 9

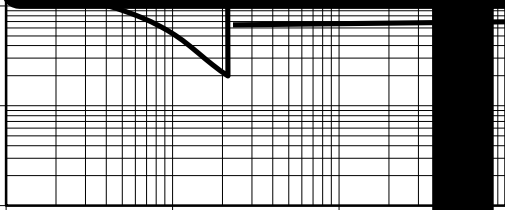


76\$ 9 5HY

:RUOG ,QWH&JKLQWDLRLOWHOG

## PACKAGE OUTLINE DIMENSIONS

### DO-201AD

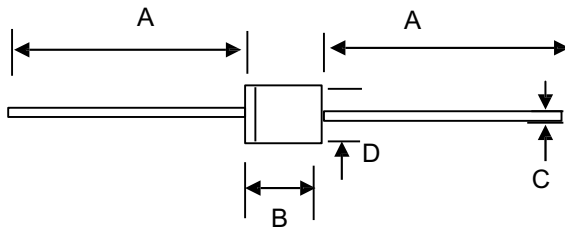


### DO-201AD mechanical data

UNIT		A	B	C	D
mm	max	26.5	9.5	1.4	5.3
	min	24.5	7.3	1.1	4.8
mil	max	1043.30	374.01	55.12	208.67
	min	946.57	287.40	39.37	188.97



0DUNLQJ ,QIRUPDWLRQ

Cathode

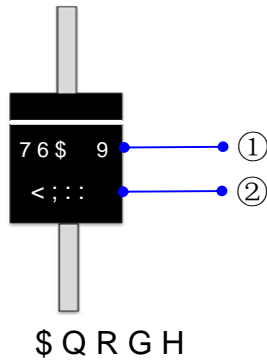

73URGXFW PQRGH

83' & LQIRUPDWLRQ

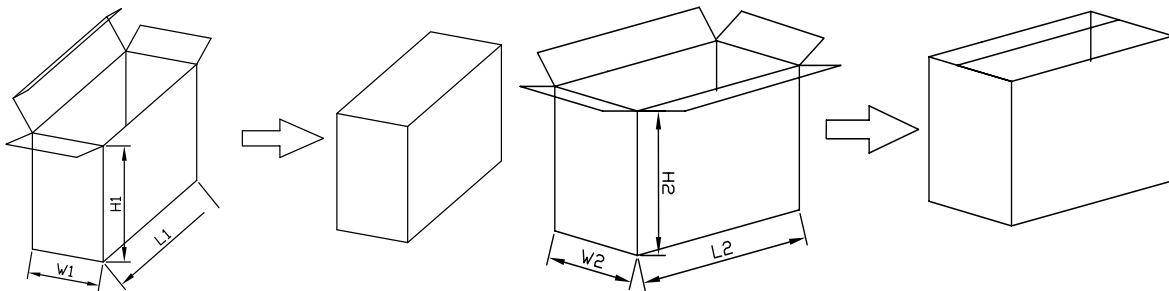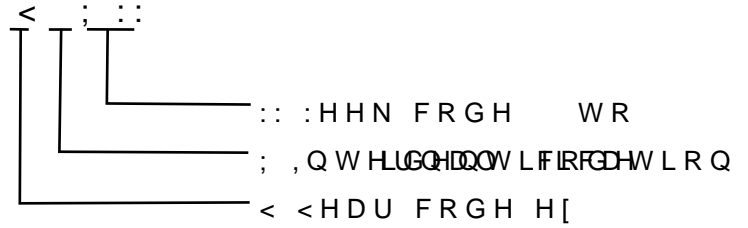

				4Í	4FÍ	Gì€	HG€
ÙVŸ	ÚÔÙ	Ù { æ  ^•cá } æ& \æ* ^ÉF€€€ÚÔÙD&æ;c [ } Á			F€€€€ÚÔÙD&æ;c [ } ÉF€à [ ç^•Áá } Ác [ cæ]		
P [ c^	V [   ^•æ } & ^	mG€ { { É†H { { L		GFÉF€€ { { É†Í { { L		F€FÉÍ€€ { { É†F€ { {	